




Light Up Your Life


LED PANEL LIGHT

Product Specification

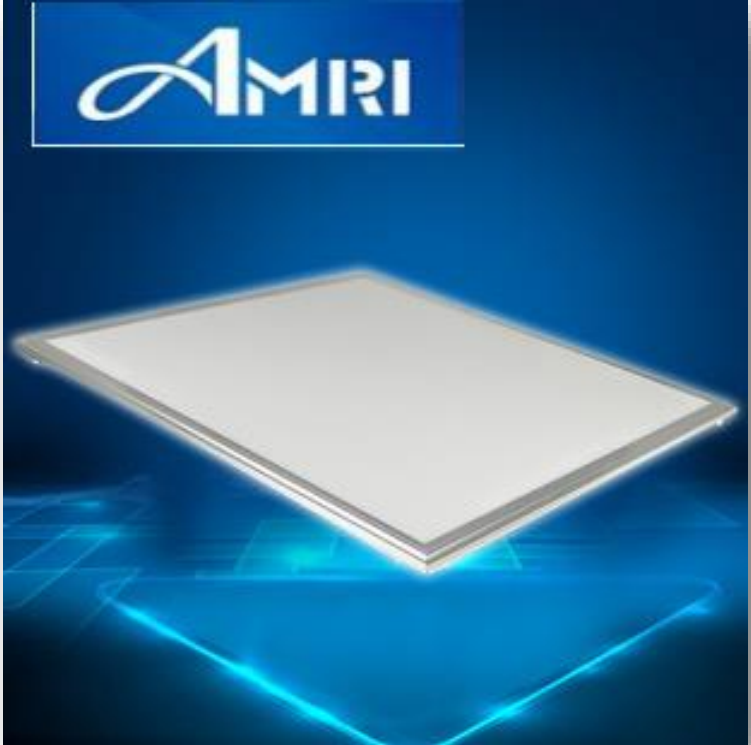

冠嶸企業有限公司
AMRI ENTERPRISE CO., LTD.
高雄市苓雅區海邊路29號8樓之1
<http://www.amriled.com>
TEL : 886-7-3353075
FAX : 886-7-3389030




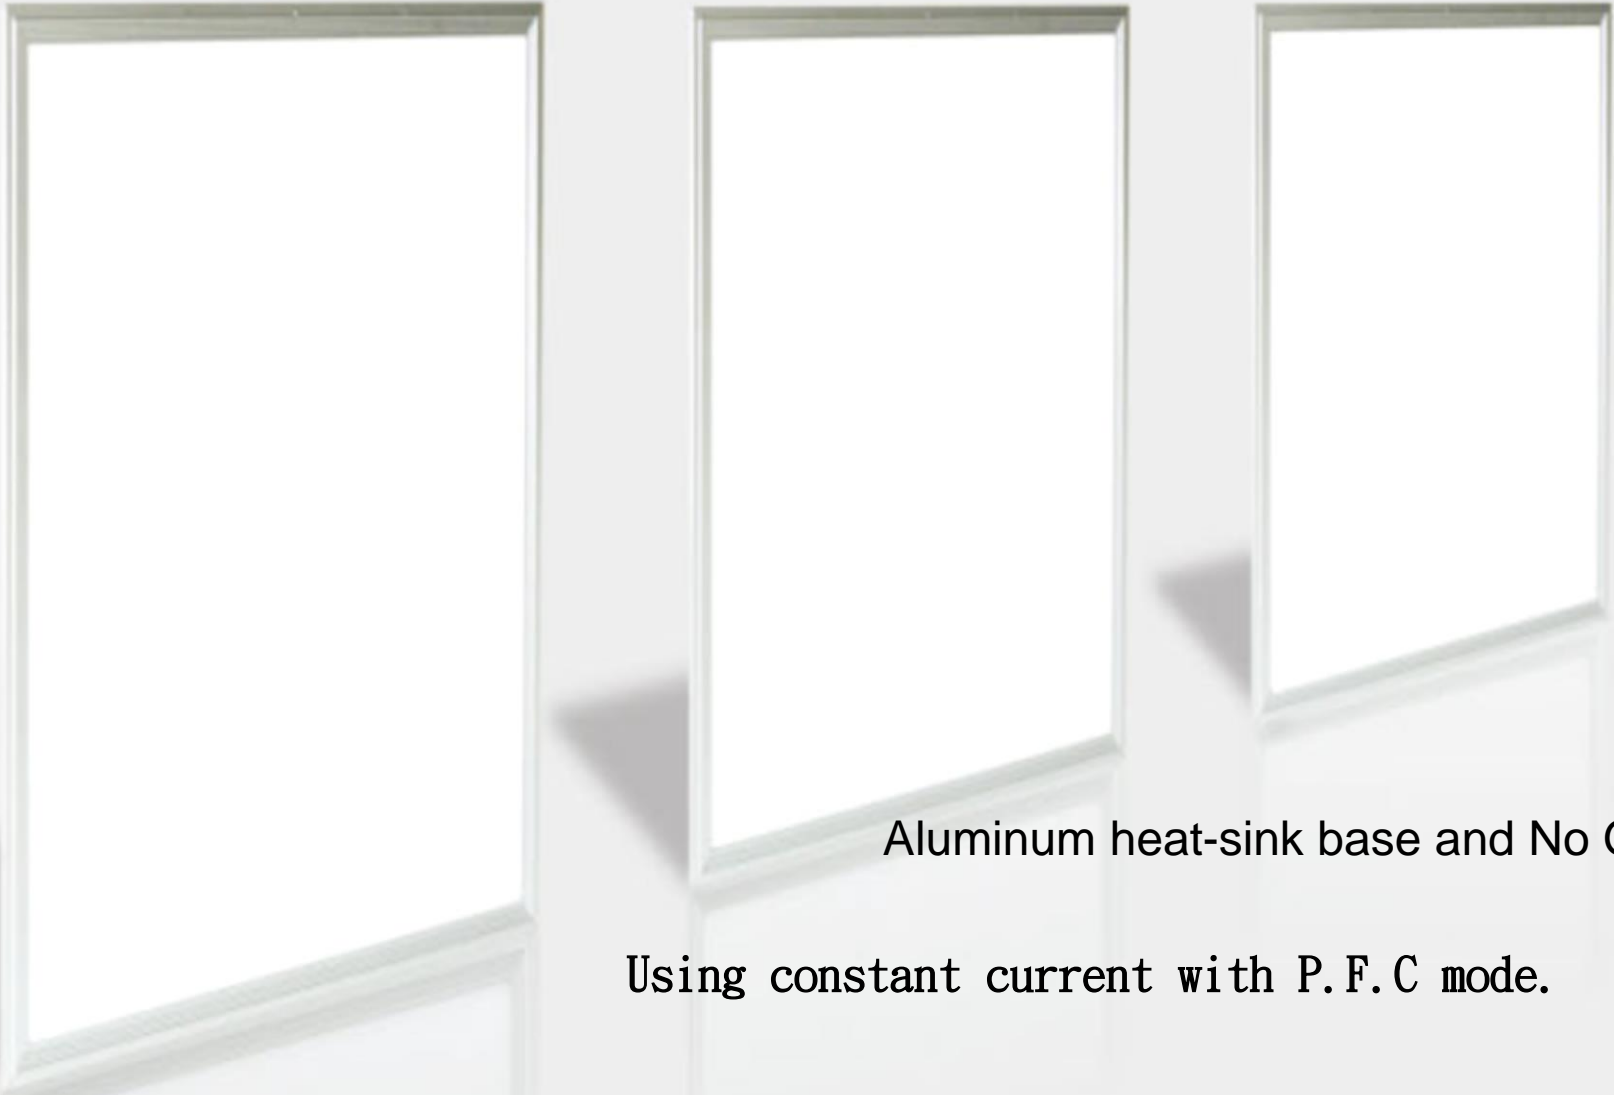

Aluminum heat-sink base and No Glare

Using constant current with P.F.C mode.


Using Hi-quality, Hi-brightness LED as lighting source, high efficiency and energy-saving, free from glare and flicker, and has average luminous surface.

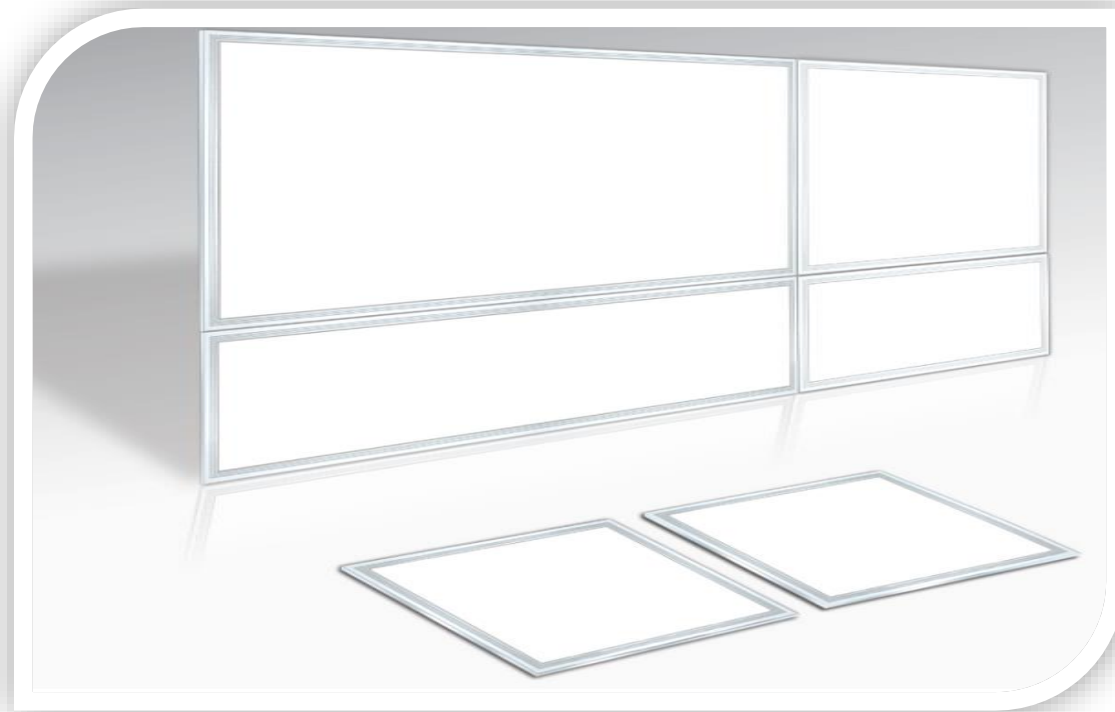


Input Voltage: AC 85~265
,50/60Hz
Color: 3000k/4000k/6000k
Angle: 180°
Temperature: -10°C-60°C
Power: PF>0.9
Use Life: 30000 Hour up

Model No.	Order No.	Power	Luminance	dimensions	Package
300x300mm	AMPA-22-XXK	22w	1400lm	300x300x8.5mm	388x384x54mm
300x600mm	AMPA-24-XXK	24w	1500lm	300x600x8.5mm	388x684x54mm
300x1200mm	AMPA-36-XXK	36w	2300lm	300x120x8.5mm	388x1284x54mm
600x600mm	AMPA-36-XXK	36w	2300lm	600x600x8.5mm	688x684x54mm
600x1200mm	AMPA-72-XXK	72w	4600lm	600x120x8.5mm	688x1284x54mm

Light Distribution Graph

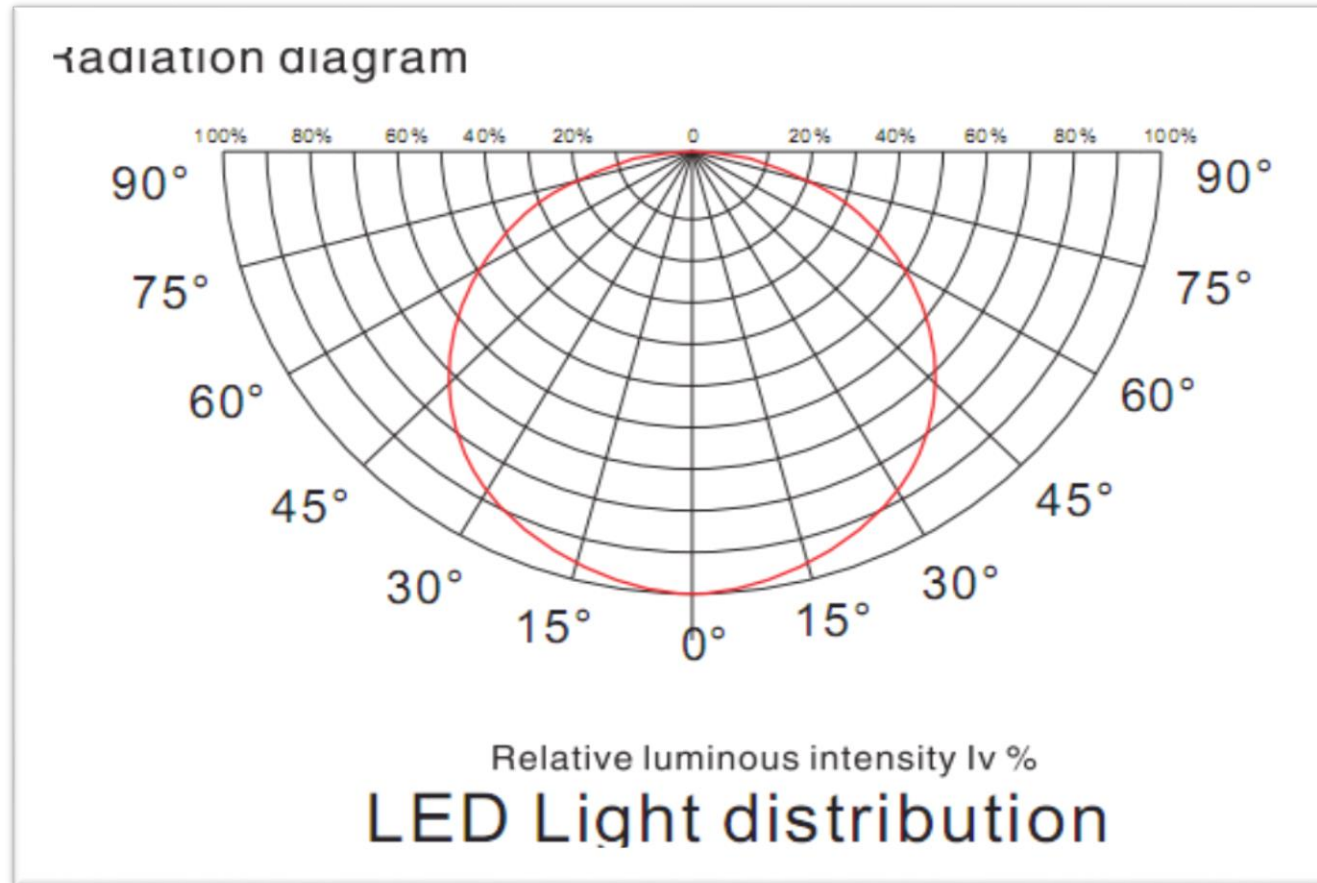


Illumination Intensity Chart: (White)

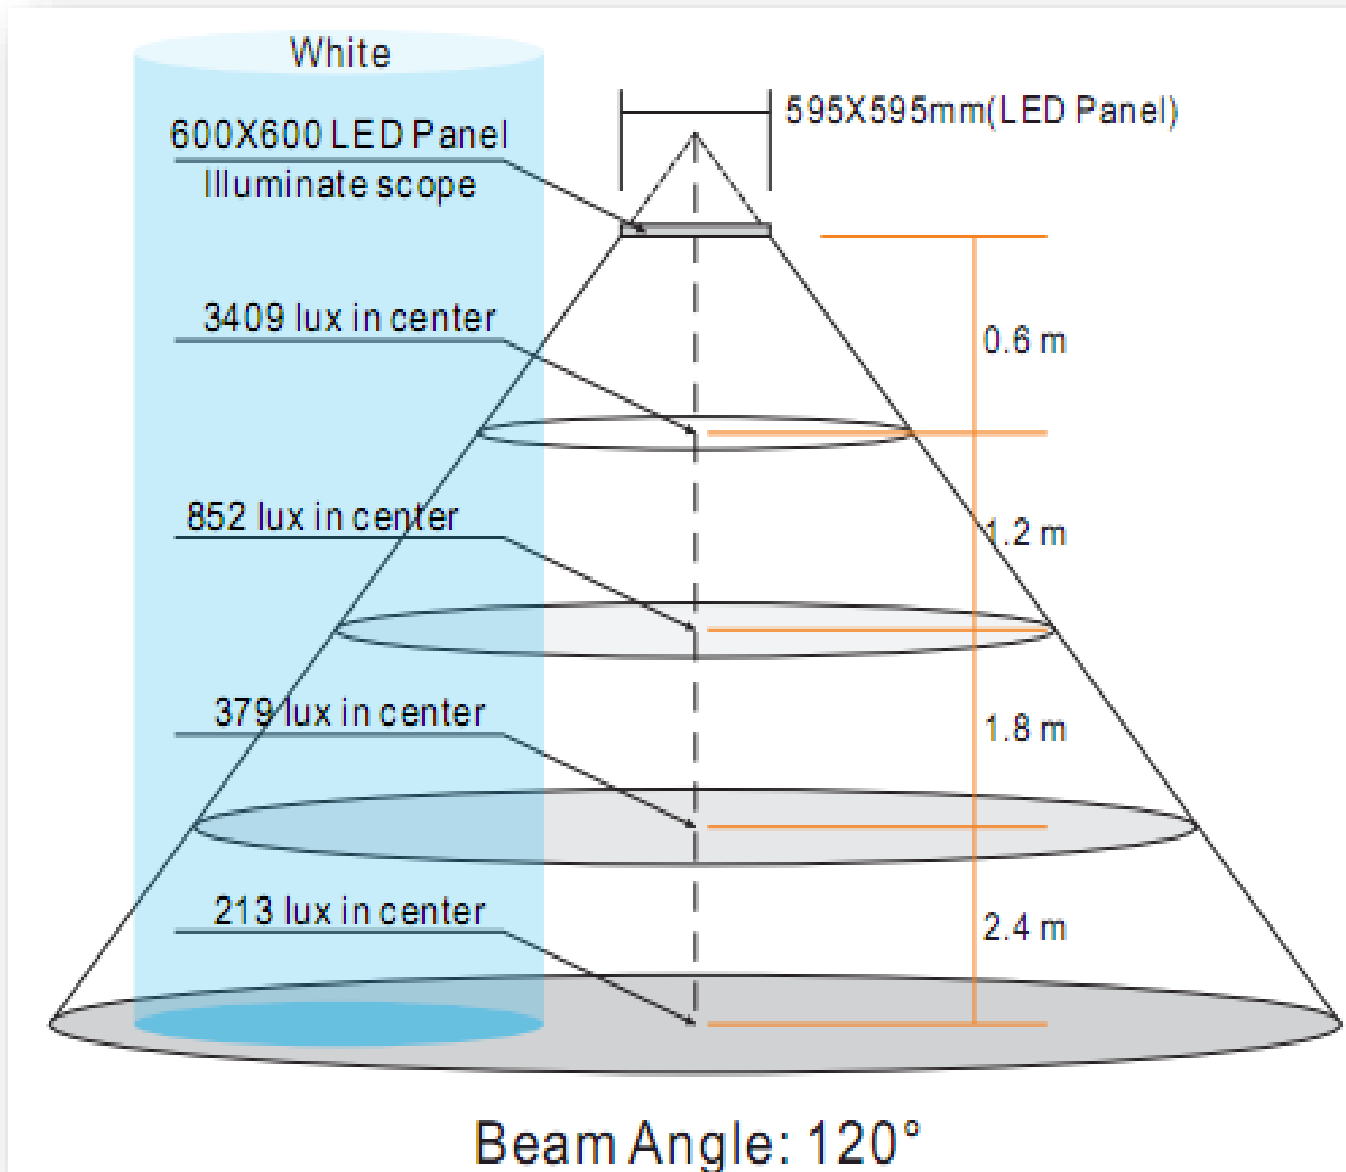

Compare illuminance

● 測試環境

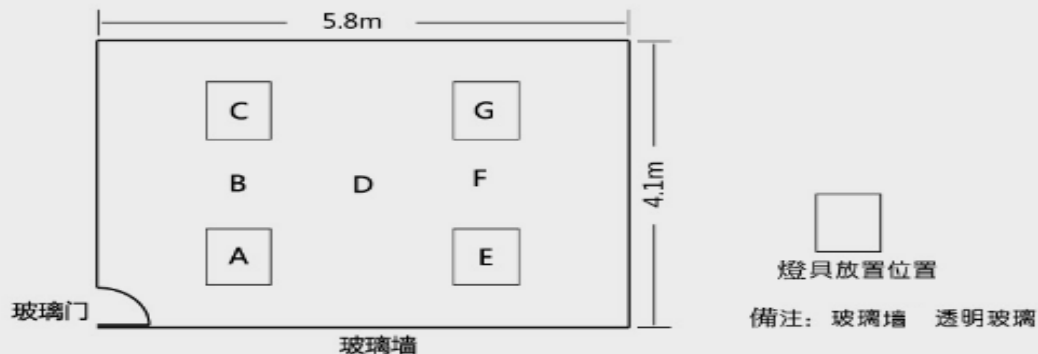

● 燈具規格


LED面板燈: 40W (600 X 600LED面板燈)
 传统格栅燈: 3 X 20W (T8傳統日光燈)
 色温相同: 5500-6000K

● 照度 (lux) 对


测试高度	1.0m		1.5m		2.8m	
	面板燈	格栅燈	面板燈	格栅燈	面板燈	格栅燈
A	529	330	673	245	367	176
B	437	220	641	190	328	107
C	486	317	649	240	314	169
D	538	170	566	180	340	145
E	530	237	653	167	344	173
F	549	235	644	220	331	112
G	528	319	645	246	326	175




安装方法 Installation

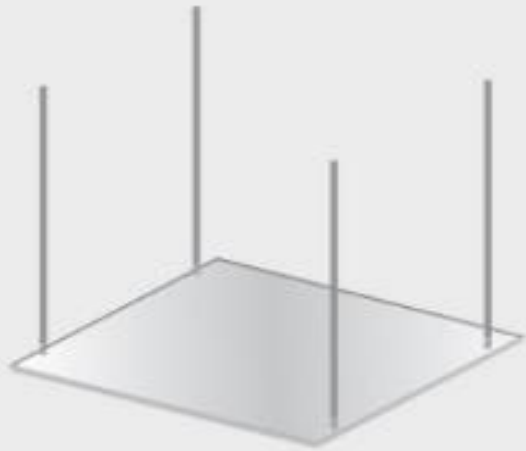

1. 吊挂式

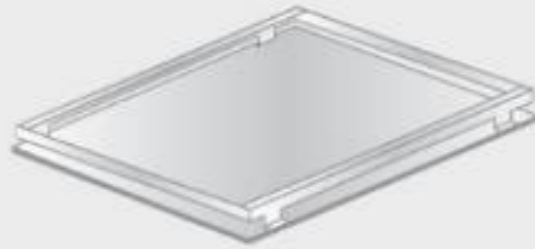


2. 支架固定式

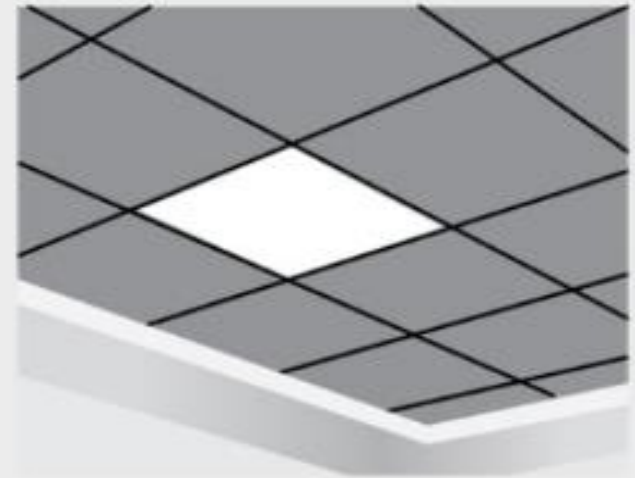


3. 嵌入式

包装方法 Package

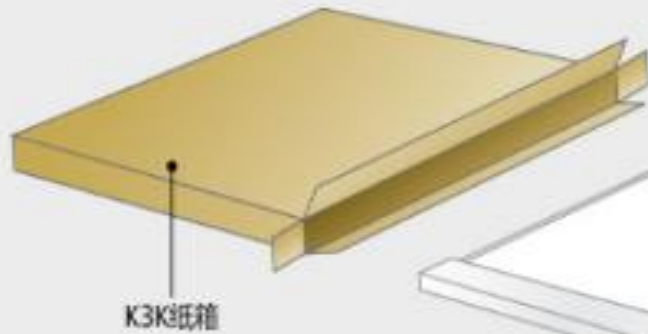


K3K3纸箱

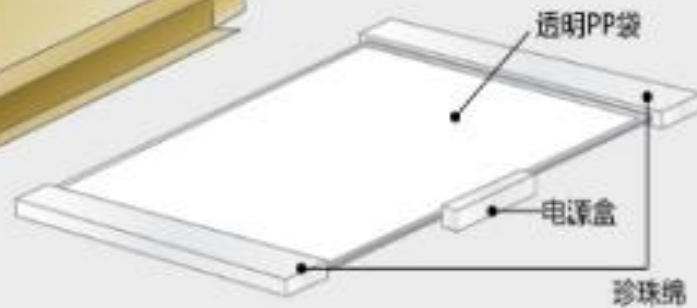

透明PP袋

电源盒

珍珠棉

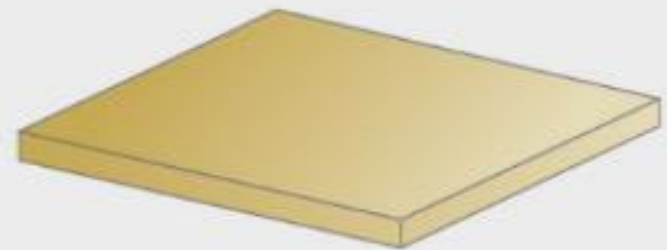

2. 包装好